


Patterson 3/8" x 7" R-ANCHOR



FOR
RECON™
BLOCKS



Fits in **Standard ReCon Steel Recess Member**




3/8" x 7" R-ANCHOR

Product Code	WD Wire Diameter	L Length	W Width	FD Foot Diameter	Ultimate Mechanical Tensile Capacity (lbs)
LRA387G	3/8"	7"	3-1/4"	1"	18,760


Stripping

ALLOWABLE LOAD ZONE



Laying Down Block


ALLOWABLE LOAD ZONE



* NOTE: When laying down block only 1/2 of the weight of the block is applied to the anchor.

Setting

ALLOWABLE LOAD ZONE

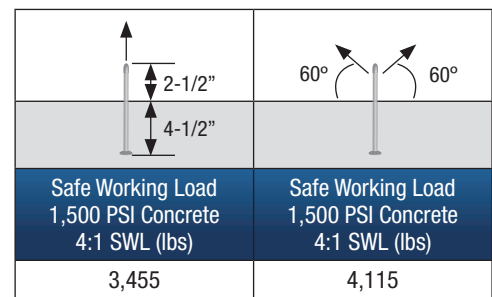

BUY ONLINE!

www.patterson-online.com


(800) 332-7090



PATERSON
Your Single Source Supplier

Installation of R-Anchor for ReCon Blocks

STRIPPING ANCHOR

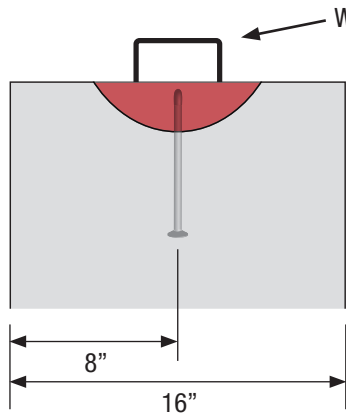

Side View

Works on 24"-84"
deep ReCon Blocks

SETTING ANCHOR

BLOCK DEPTH

24"	39"	45"	60"	66", 72", 78" or 84"
<p>Bottom Slot</p> <p>24"</p> <p>FORMLINER</p>	<p>Top Slot</p> <p>39"</p> <p>FORMLINER</p>	<p>45"</p> <p>22"</p> <p>FORMLINER</p>	<p>60"</p> <p>28"</p> <p>FORMLINER</p>	<p>66" 72" 78" or 84"</p> <p>46"</p> <p>22"</p> <p>FORMLINER</p>

BUY ONLINE!

www.patterson-online.com

(800) 332-7090



PATTERSON
Your Single Source Supplier