



**PATTERSON**  
Your Single Source Supplier



# UTILITY-LIFT URETHANE RECESS MEMBER



**RECESS MEMBER LENGTH:**

The Patterson Recess Member is **9" LONG**, which makes it easier to fit larger hooks in the void.

**EXTREMELY DURABLE:**


Urethane recess member will last at least **5 TIMES LONGER** than rubber recess members.

**FIBERGLASS REINFORCED JOINT:**

Unlike other recess members that have holes in the joints, ours is **SOLID** and has fiberglass reinforcement to ensure **LONG-TERM DURABILITY**.


**FAST, EASY REMOVAL FROM CONCRETE:**

Flexible urethane material makes our recess member **EXTREMELY EASY TO REMOVE FROM CONCRETE**, unlike other recess members made of stiffer material.

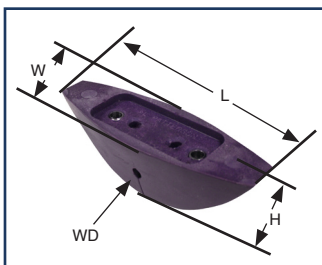

3 SIZES AVAILABLE					
Product Code	Anchor Angle	WD- Wire Diameter	L-Length	H-Height	W-Width
TKURM149	90°	<b>14mm</b>	9"	3-1/2"	3"
TKURM449	90°	<b>.444"</b>	9"	3-1/2"	3"
TKURM679	90°	<b>.671" / 18mm</b>	9"	3-1/2"	3"

**Note:** Urethane can handle temperatures up to 180 degrees. Using a petroleum-based form release will drastically shorten the life of a urethane recess member.

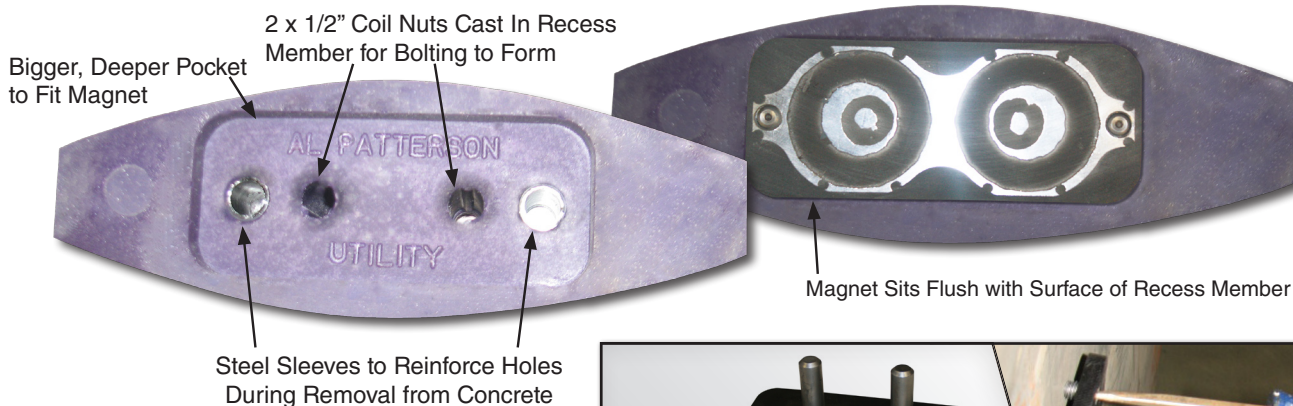

Set Screws for Easy Magnet Removal



**IN STOCK AND READY TO SHIP!**

**WWW.PATTERSON-ONLINE.COM | (800) 332-7090**